

FLEXIBLE CONTROL,
COMPACT DESIGN

Wall-mount Remote Control – 6 buttons


HmIP-WRC6 | HmIP-WRC6-A

The flexible wall-mount remote control offers the right solution for a large number of different applications in the smart home: Three pairs of buttons can be used to trigger several functions at the same time, according to the user's personal needs. Thanks to battery operation, the push-button can be easily mounted at any desired location or integrated into existing switch series.



Available in white and anthracite

homematic 
Smart Living, Simply Exciting.

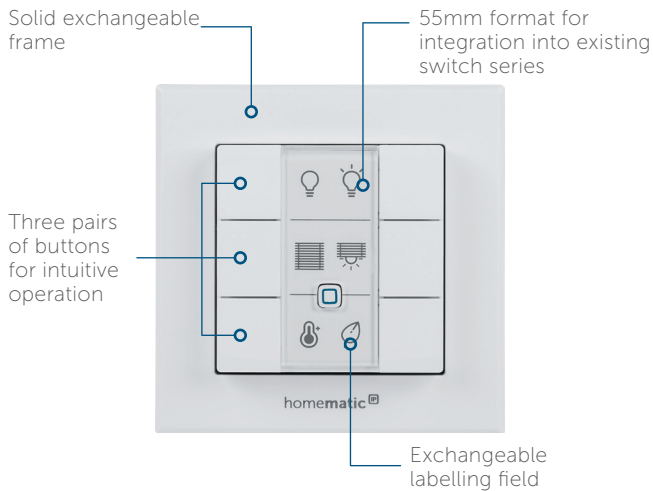

THE IDEAL FUNCTION FOR EACH APPLICATION

The six intuitive push-buttons offer comfortable control of several devices or system functions in your smart home at the touch of a button.

The device can be used to switch light sources on or off, activate or deactivate the eco mode or to move shutters up or down.

INDIVIDUAL FUNCTIONS

Thanks to the exchangeable labelling field for the individual buttons, the wall-mount remote control can be easily adapted to individual requirements and applications. You can use standard labelling fields with texts and symbols or free templates (various labelling templates are available at www.homematic-ip.com).

MODULAR DESIGN FOR HIGH FLEXIBILITY

Thanks to its modular design, the wall-mount remote control offers individual use:

- ✓ Adhesive or screw mounting in the supplied clip-on frame with enclosed mounting material
- ✓ Integration into existing switches with 55 mm frames of the the most common manufacturers
- ✓ Installation on a free flush-mounted box with corresponding mounting plate
- ✓ Integration into Homematic IP Desk Stand (HmIP-DS55) for increased battery lifetime
- ✓ As an alternative to battery operation, the wall-mount remote control can also be supplied with 230 V via the Homematic IP Power Supply Unit for brand switches (HmIP-BPS).

QUICK AND EASY INSTALLATION

Easy installation without any wiring effort thanks to battery operation and radio communication. The device can be placed where it is needed. It is ideal for mounting on walls, glass or furniture, for example – without the need to lay any power cables. Only the supplied adhesive strips or screws are required for installation. Thanks to residue-free removal of the adhesive strips, the wall-mount remote control is even suitable for rented property.

To enable operation, the device has to be connected with one of the following solutions:

- Homematic IP Access Point with free smartphone app and free cloud service
- Third-party solutions of partners

TECHNICAL SPECIFICATIONS

Supply voltage	2x 1.5 V LR03/micro/AAA
Battery life	4 years (typ.)
Degree of protection	IP20
Ambient temperature	5 to 35 °C
Dimensions (W x H x D)	
Without frame:	55 x 55 x 20 mm
Including frame:	86 x 86 x 22 mm
Weight	95 g (including batteries)
Radio frequency band	868.0-868.6 MHz 869.4-869.65 MHz
Typ. open area RF range	200 m

LOGISTICAL DATA

Version	White	Anthracite
Product reference	142308A0	159828A0
EAN code	4047976423088	4047976598281
Short description	HmIP-WRC6	HmIP-WRC6-A
Packing unit	90	90
Packing dimensions	122 x 112 x 48 mm	122 x 112 x 48 mm
Weight incl. packaging	182,0 g	182,0 g

PACKAGE CONTENTS

Homematic IP Wall-mount Remote Control – 6 buttons
 Labelling template
 Clip-on frame and mounting plate
 Mounting accessories
 1.5 V LR03/micro/AAA batteries (2x)
 User manual