


VERSATILE  
PUSH-BUTTON AND  
STATUS DISPLAY  
IN ONE DEVICE

# Wired Wall-mount Remote Control – 6 buttons


HmIPW-WRC6 | HmIPW-WRC6-A

The versatile wall-mount remote control is the ideal solution for any smart home application. Single and multiple functions can be operated simultaneously at the touch of a button. Integrated multicolour LEDs display different states within the smart home.

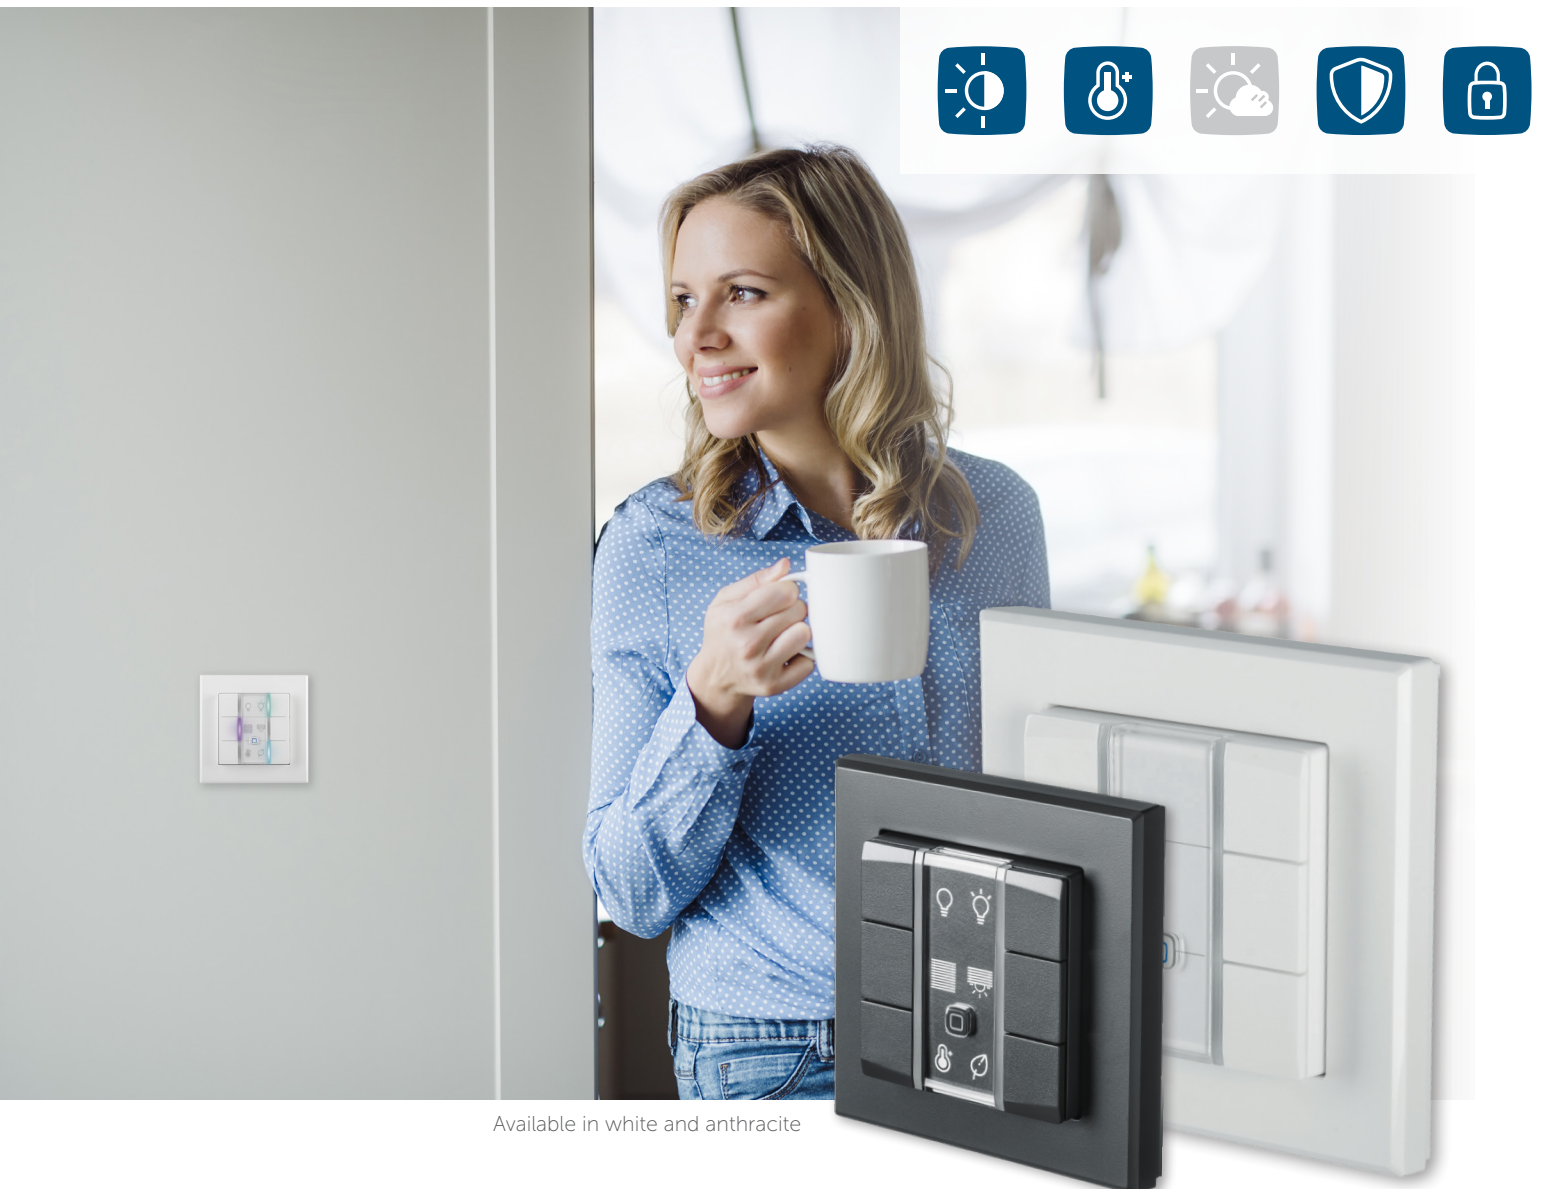

Available in white and anthracite

homematic <sup>IP</sup>  
wired

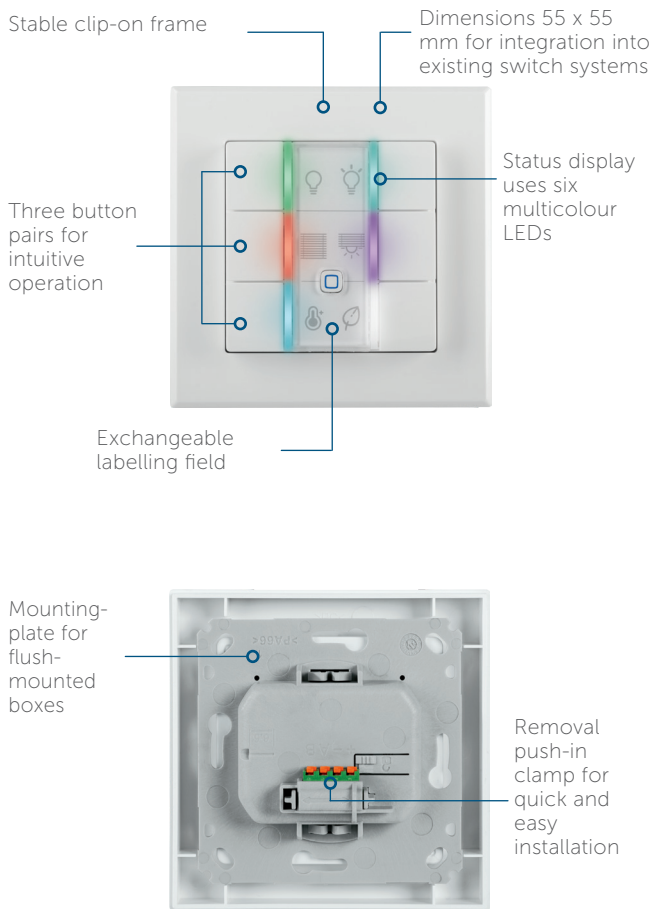

## MULTIPLE SMART OPTIONS

Six intuitive buttons enable devices and system functions to be easily operated at the touch of a button. For example, the on/off switching of light sources, activating/deactivating eco modes, and raising/lowering shutters.

Each of the six buttons has an integrated status LED that can light up, flash or pulsate in seven different colours. The LEDs can be used to display a wide range of system states such as actual alarm mode, switched-on lights and open windows.

## CUSTOMISABLE

Exchangeable labelling fields for each button make the wall-mount remote control easily adaptable to personal preferences and purposes. Labels are available with text and symbols as well as free templates (various labelling templates are available at [www.homematic-ip.com](http://www.homematic-ip.com)).

## QUICK AND EASY MOUNTING

Optimised for easy mounting on flush-mounted boxes using the supplied mounting plate. Removable push-in clamp with spring-loaded terminals facilitates connection to the wired bus.

## EASY INSTALLATION INTO EXISTING SYSTEMS

The wall-mount remote control is easy to install into existing 55 mm frame switch series from leading manufacturers (an overview of compatible manufacturers is available at [www.homematic-ip.com](http://www.homematic-ip.com)).

## POWER SUPPLY VIA WIRED BUS

Connection via the Homematic IP Wired Bus for reliable power supply and secure communications between devices.

The wired system can be operated via the free Homematic IP app, the WebUI of the CCU3 as well as through many partner systems.

- The Homematic IP Wired Access Point is required to operate the Wired system.

## TECHNICAL SPECIFICATIONS

Supply voltage	24 VDC, +5 % -20 %, SELV
Current consumption	40 mA (max.)
Standby power consumption	45 mW
Installation	only in normal commercial switch boxes (device boxes) in accordance with DIN 49073-1
Cable type and cross section	rigid cable, 0.12-0.50 mm <sup>2</sup>
Degree of protection	IP20
Ambient temperature	-5 to +40 °C
Dimensions (W x H x D)	
Without frame	71 x 71 x 40 mm
Including frame	85 x 85 x 40 mm
Weight	68 g
Integrated LED colours	Blue, green, turquoise, red, purple, yellow, white

## LOGISTICAL DATA

Version	White	Anthracite
Product reference	154288A0	159869A0
EAN code	4047976542888	4047976598694
Short description	HmIPW-WRC6	HmIPW-WRC6-A
Packing unit	60	60
Packing dimensions	122 x 112 x 73 mm	122 x 112 x 73 mm
Weight incl. packaging	207 g	207 g

## PACKAGE CONTENTS

Homematic IP Wired Wall-mount Remote Control – 6 buttons  
 Clip-on frame and mounting plate  
 Screws (4x)  
 Labelling template  
 Operating manual